

REPLACEMENT PARTS GUIDE

Z925M EFI ZTrak™ M Series Mower

ENGINE



OIL FILTER

[AM125424](#)

Change every 100 Hrs.



ENGINE OIL

[TY22029](#) (Turf-Gard™ - 10W-30) (With Filter)
(1.9 L (2.0 qt))

Change every 100 Hrs.



AIR FILTER

[M131802](#) (PRIMARY)

Change every 300 Hrs.

[M131803](#) (SECONDARY)

Change every 500 Hrs.



Multi-Purpose SD Polyurea Grease
[TY6341](#)

GREASE GUN

[TY26518](#)

Change As Required.



FUEL FILTER

[MIU13224](#) (USE WITH [MIA12253](#))

[UC16183](#) (USE WITH [MIA13021](#) OR
[MIA12650](#) OR [AUC14248](#))

Change every 300 Hrs.



SPARK PLUG

[MIU11020](#)

Change every 1000 Hrs.



ELECTRICAL



IGNITION SWITCH

[TCA22740](#) (S/N (- 070000))

[AUC18708](#) (S/N (070001-))



HEADLIGHT BULB

[AM118013](#) (37.5 W)



IGNITION KEY

[AUC12681](#)



BATTERY

[TY25221B](#) (12 V) (FOR CANADA AND USA)

[MCYP340PF](#) (12 V) (NOT FOR CANADA AND USA)

FUEL & AIR



FILLER CAP

[TCA23672](#) (S/N (- 060000))

[AUC11638](#) (S/N (060001-))



MUFFLER

[TCA21571](#)

TRANSMISSION/ HYDRAULIC



HYDRAULIC OIL FILTER

[MIA881446](#)

Change every 500 Hrs After 300 hour Initial Break In






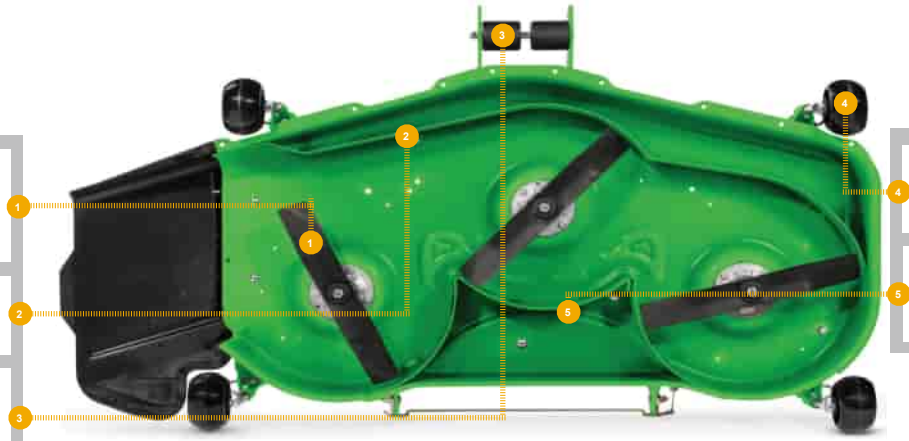
TRACTION DRIVE BELT



[TCU34299](#) (LGTH = 1803.9 mm,
WIDTH = 16 mm)

REPLACEMENT PARTS GUIDE

Z925M EFI with 54 inch Deck




	MOWER BLADE TCU30317 (HIGH LIFT) TCU30316 (STANDARD LIFT)
	MULCH BLADE M135334
	ROLLER TCU34060

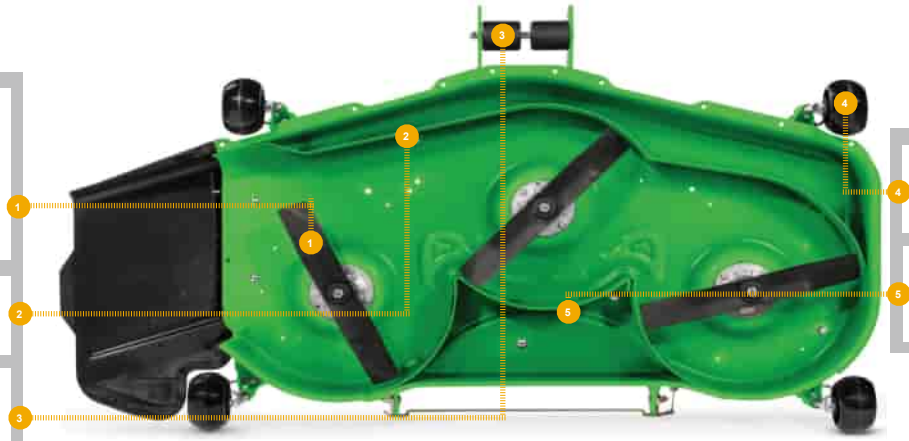




	GAGE WHEELS UC28193
	V BELT TCU31132 (LGTH = 4635 mm, TK = 18 mm, WIDTH = 14 mm)

REPLACEMENT PARTS GUIDE

Z925M EFI with 60 inch Deck

	MOWER BLADE TCU15881 (HIGH LIFT) UC15158 (HIGH LIFT SELF SHARPENING) M128485 (STANDARD LIFT) M133381 (LOW LIFT)
	MULCH BLADE M168223
	ROLLER TCU34060



	GAGE WHEELS UC28193
	V BELT TCU35604 (LGTH = 4635 mm, TK = 18 mm, WIDTH = 14 mm)