



# REPLACEMENT PARTS GUIDE

4066R Compact Utility Tractor (MY24-) (PIN: 1LV4066R\*PR100101- ) (Worldwide Edition)


### ENGINE




**ENGINE OIL**  
[TY26669](#) (John Deere Plus-50™ II Premium)  
 (10W-30) (5.4 L (5.7 qt))  
 Change every 400 hrs/ Annually.




**SPIN-ON FUEL FILTER**  
[MIA882963](#)  
[MIU803127](#)  
 Change after every 400 Hrs/Annually.




**AIR FILTER**  
[RE68048](#) (PRIMARY)  
[RE68049](#) (SECONDARY)  
 Change after every 600 Hrs or annually.




**JD MULTI PURPOSE HD LITHIUM COMPLEX GREASE**  
[TY6341](#)  
**GREASE GUN**  
[TY26183](#)  
 Change As Required.




**OIL FILTER**  
[M806419](#)  
 Change after every 400 Hrs or annually, whichever comes first.



**FUEL-WATER SEPARATOR**  
[MIA885324](#) (SEPARATOR)  
[MIU802421](#) (FILTER ELEMENT)  
 Change after every 400 Hrs or annually.




**FILTER PAK**  
[TA25765](#)




**DIESEL PARTICULATE FILTER**  
[MIU803276](#)


### AXLE




**TIE ROD**  
[LVA14951](#) (ASSEMBLY)  
[LVA14960](#) (LH)  
[LVA14959](#) (RH)




**FRONT AXLE OIL**  
[TY22035](#) (John Deere Low Viscosity Hy-Gard™)  
 (5.5 L (5.8 qt) - STANDARD)  
 (8.0 L (8.5 qt) - HEAVY DUTY)  
 Change every 600 hrs.

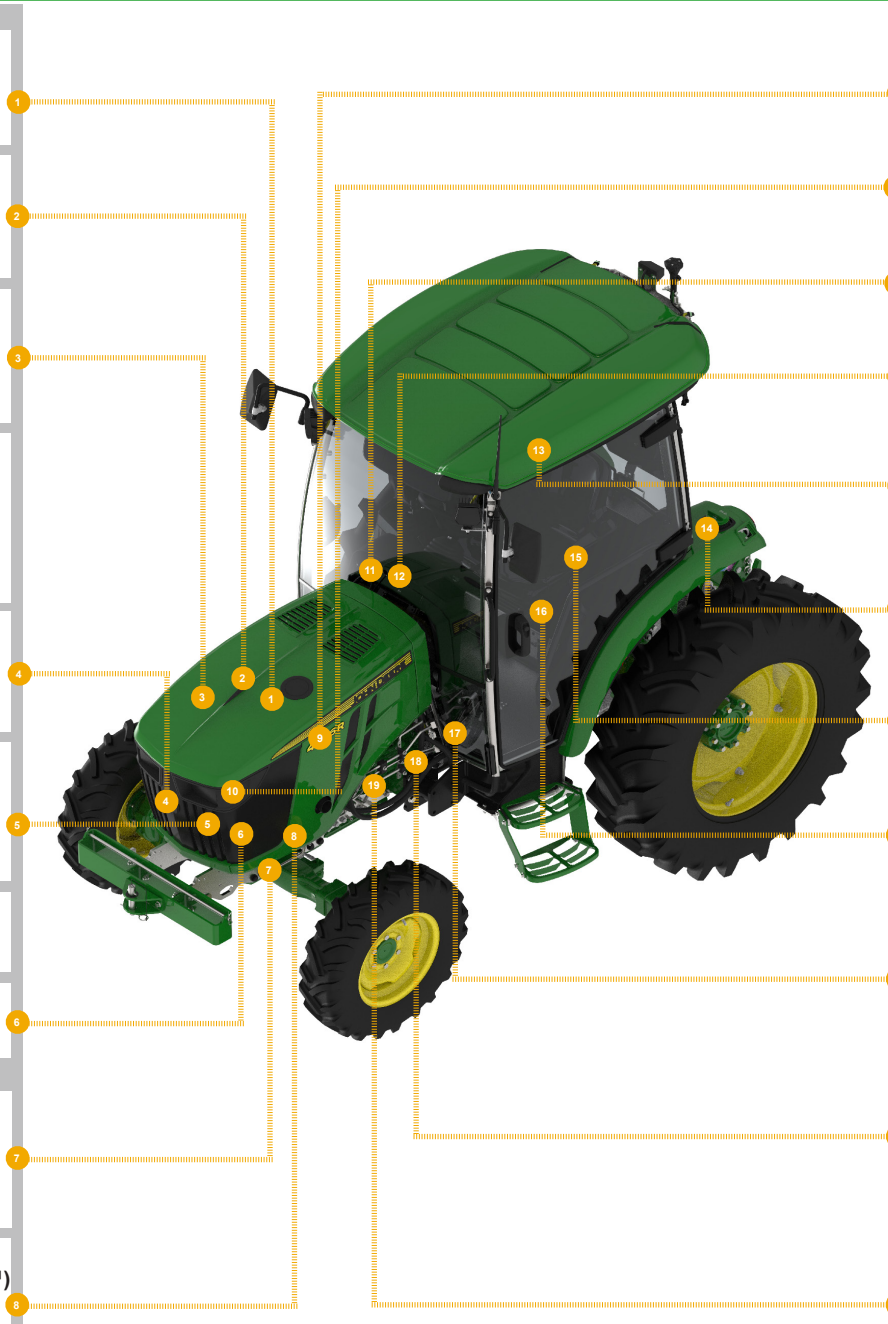


### ELECTRICAL




**BATTERY**  
[TY26442B](#) (12 V)




**HEADLIGHT**  
[TA26778](#) (LED) (12 V)



**KEY**  
[RE183935](#)




**IGNITION SWITCH**  
[LVA21501](#) (14 V)




**LED WORK LIGHT**  
[TA25218](#) (OOS) (12 V)  
[RE593795](#) (CAB) (12 V)

### FUEL & AIR




**FILLER CAP**  
[AL213202](#)

### CAB




**CAB FILTER**  
[MIU10010](#)  
 Clean or replace after every 50 hours.




**RECIRCULATION AIR FILTER**  
[MIU10011](#)  
 Clean or replace after every 50 hours.


### TRANSMISSION/ HYDRAULIC



**TRANSMISSION/HYDRAULIC OIL**  
[TY22000](#) (John Deere Low Viscosity Hy-Gard™) (47.3 L (12.5 gal))  
 Change after every 400 Hrs or annually



**OIL FILTER**  
[RE45864](#) (TRANSMISSION)  
[LVA10419](#) (HYDRAULIC)  
[LVA23443](#) (FRONT PTO FILTER)  
 Change after every 400 Hrs or annually.



**V - BELT**  
[TR131486](#) (ALTERNATOR) (LGTH = 1112 mm, WIDTH = 13.4 mm, TK = 9.6 mm)  
[LUV29375](#) (HVAC) (LGTH = 1508 mm, WIDTH = 13.4 mm, TK = 9.6 mm)