



REPLACEMENT PARTS GUIDE


2500B Riding Greens mower (Diesel)


ENGINE


 **ENGINE OIL FILTER**
[M806418](#)


ENGINE OIL
[TY26669](#) (Turf Gard™ 10W30)
(John Deere PLUS-50™ II),
(2.2 L (2.3 qt))
Change Every 50/ 250/500 Hrs.


 **HEADLIGHT**
[AUC15463](#) (12 V)


 **FUEL FILTER**
[MIU804763](#)
Change Every 500 Hrs.

 **AIR FILTER**
[M113621](#) (PRIMARY)
[M123378](#) (SECONDARY)
Change Every 200 Hrs.

 **HYDRAULIC FILTER**
[AM102723](#)
Change Every 50/750 Hrs.


 **HYDRAULIC OIL** [TY22062](#)
John Deere J20C Hy-Gard™
(20.4 L (5.4 gal))
Change Every 50/750 Hrs.


 **MULTI-PURPOSE SD POLYUREA GREASE**
[TY6341](#)
Change Interval:As needed.

 **GREASE GUN**
[TY26183](#)





FUEL AND AIR


 **FUEL TANK FILLER CAP**
[LVA18519](#) (USE WITH TCA21553), (GREEN)
[AM123508](#) (USE WITH TCA16364), (RED)


 **MUFFLER**
[TCA15622](#)

ELECTRICAL

 **ROTARY SWITCH**
[TCA22740](#) (S/N - 110000)
[AUC18708](#) (S/N 110001 -)

 **KEY**
[AUC12681](#)

 **BATTERY**
[MCYP25876](#) (12V) (NOT FOR CANADA AND USA)
[TY25876B](#) (12V) (FOR CANADA AND USA)

 **TRACTION DRIVE BELT**
[TCU21861](#) (LGTH = 1230.00 mm, TK = 5.25 mm, WIDTH = 21.30 mm) (S/N - 050000)
[M97340](#) (LGTH = 1353.40 mm, TK = 5.21 mm, WIDTH = 21.30 mm), (S/N 050001 -)

REPLACEMENT PARTS GUIDE

2500B Riding Greens Mower (Gas)

ENGINE

SPARK PLUG

[MIU13128](#) (USE WITH MIA11912 OR MIA11920 OR MIA12108 OR MIA12456 OR MIA12808)

[M805853](#) (USE WITH MIA11094 OR MIA11767)



ENGINE OIL FILTER

[AM107423](#)

ENGINE OIL

[TY22029](#) (Turf Gard™ 10W30) (2.1 L (2.2 qt))
Change Every 50/100/500 Hrs.



HEADLIGHT

[AUC15463](#) (12 V)



FUEL FILTER IN LINE

[AM116304](#)



AIR FILTER

[MIU11376](#) (SECONDARY) (PAPER)

[M76076](#) (PRIMARY) (FOAM)

Change Every 200 Hrs.



HYDRAULIC FILTER

[AM102723](#)

HYDRAULIC OIL

[TY22062](#) (John Deere J20C Hy-Gard™) (20.4 L (5.4 gal))

Change Every 50/750 Hrs.



MULTI- PURPOSE SD POLYUREA GREASE

[TY6341](#)

Change Interval:As needed.



GREASE GUN

[TY26183](#)



FUEL AND AIR

FUEL TANK FILLER CAP

[AM123507](#) (USE WITH TCA16715)

[AM141406](#) (USE WITH TCA23137)

[AUC12860](#) (USE WITH AUC14253)



MUFFLER

[TCA23955](#)



ELECTRICAL

ROTARY SWITCH

[TCA22740](#) (S/N - 110000)

[AUC18708](#) (S/N 110001 -)



KEY

[AUC12681](#)



BATTERY

[MCYP25876](#) (12V) (NOT FOR CANADA AND USA)

[TY25876B](#) (12V) (FOR CANADA AND USA)



TRACTION DRIVE BELT

[TCU21861](#) (LGTH = 1230.00 mm, TK = 5.25 mm, WIDTH = 21.30 mm) (S/N - 050000)

[M97340](#) (LGTH = 1353.40 mm, TK = 5.21 mm, WIDTH = 21.30 mm) (S/N 050001 -)



IGNITOR

[AM105574](#)



JOHN DEERE
Genuine Parts and Service

CLICK PART NUMBER TO BUY

*See operator's manual for additional details.

REPLACEMENT PARTS GUIDE

2500B Greens Mower Reel Cutting Unit

STATIONARY KNIFE

[UC23562](#) (HEIGHT OF CUT = 7.6 mm),

[UC28156](#) (HEIGHT OF CUT = 4.8 mm),

[UC18873](#) (HEIGHT OF CUT = 3.2 mm),
(STANDARD)

[ET11066](#) (HEIGHT OF CUT = 3.2 mm),
(GREENS)

[UC18869](#) (HEIGHT OF CUT = 2.5 mm),
(TOURNAMENT)

[UC23562](#) (HEIGHT OF CUT = 7.6 mm),

[UC28163](#) (HEIGHT OF CUT = 2.0 mm),
(LOW CUT)

[TCU36165](#) (HEIGHT OF CUT = 2.0 mm),
(GREENS LOW-CUT HARDENED STEEL)

[UC18873](#) (HEIGHT OF CUT = 3.2 mm),
(STANDARD)

[ET11066](#) (HEIGHT OF CUT = 3.2 mm),
(GREENS)

[UC18869](#) (HEIGHT OF CUT = 2.5 mm),
(TOURNAMENT)

MOWER REEL

[TCA19350](#) (7 BLADE) (S/N 030001-)

[AMT2883](#) (7 BLADE) (S/N - 030000)

[TCA19351](#) (11 BLADE) (S/N 030001-)

[AMT2885](#) (11 BLADE) (S/N - 030000)

[TCA23621](#) (14 BLADE) (S/N 030001-)

SCRAPER

[BM23002](#) (GROOVED ROLLER SCRAPER),

[BM21865](#) (MACHINE GROOVED ROLLER
SCRAPER), (2INCH) (S/N - 040000)

[TCA19547](#) (MACHINE GROOVED ROLLER
SCRAPER), (2INCH) S/N 040001-)

[BUC10113](#) (SMOOTH SCRAPER KIT),
(FRONT), (2 INCH)

[BUC10112](#) (SMOOTH SCRAPER), (REAR),
(2 INCH)

ROLLER

[BM24202](#) (HOLLOW SMOOTH ROLLER),
(2 INCH)

[BM18480](#) (HOLLOW SMOOTH FRONT
ROLLER), (2 INCH)

[BM18711](#) (SMOOTH FRONT ROLLER),
(2 INCH)

[AMT2967](#) (SMOOTH ROLLER), (3 INCH)

[BM25317](#) (HEAVY DUTY GROOVED DISC
FRONT ROLLER), (3 INCH)

[BM19817](#) (SPIRAL GROOVED FRONT
ROLLER), (3 INCH)

[AMT1286](#) (GROOVED END SPIRAL
ROLLER), (3 INCH)

[BM22995](#) (SMOOTH ROLLER SCRAPER),

[BM19821](#) (MACHINED SPIRAL GROOVED
FRONT ROLLER), (2 INCH)

[BE23416](#) (MACHINE GROOVED FRONT
ROLLER), (2 INCH)

[BM18481](#) (CONTINUOUS MACHINE
GROOVED FRONT ROLLER),
(2 INCH)

[BTC10267](#) (RELIEVED GROOVED ROLLER)

[BM18712](#) (EXTENDED MACHINE GROOVED
FRONT ROLLER), (2 INCH)

[BM23566](#) (RELIEVED SPIRAL GROOVED
ROLLER), (2 INCH)

[BM26408](#) (GROOVED ROLLER), (2.5 INCH)


GRASS CATCHER

[TCA15261](#) (GRASS CATCHER),
(S/N -030000)

[BTC10718](#) (GRASS CATCHER),
(S/N 030001 - 060000)

[BTC10408](#) (REAR GRASS CATCHER,
(S/N -060001)


[BTC10909](#) (FRONT GRASS CATCHER),
(22 INCH)

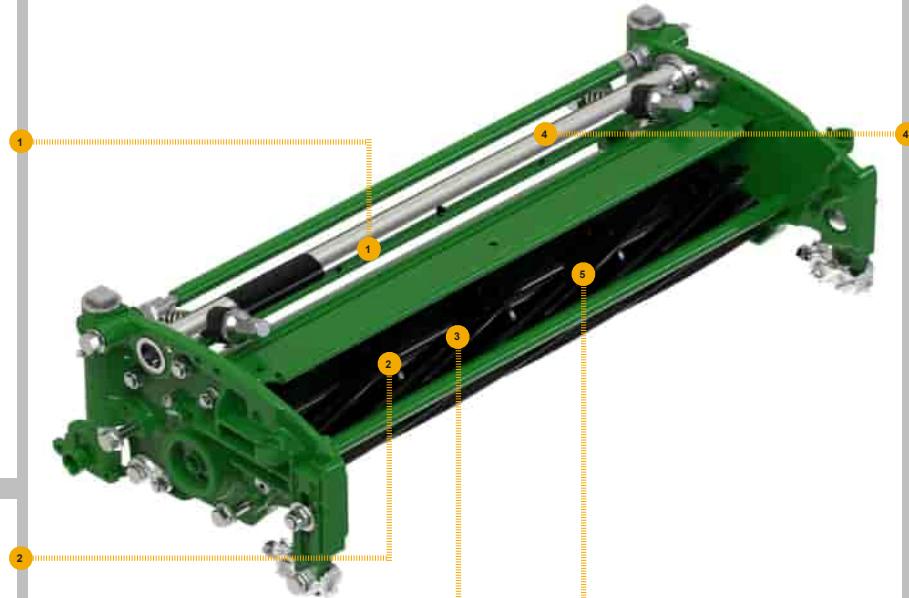

REPLACEMENT PARTS GUIDE

2500B Greens Mower Reel Cutting Unit


 **TORSION SPRING**
[Y3082BN](#)

 **SYNCHRONOUS BELT**
[TCU32422](#) (LGTH = 375 mm,WIDTH = 11 mm)

 **VOLTAGE REGULATOR**
[AUC12632](#)



 **BRACKET**
[UC16109](#) (RH)
[UC18211](#) (LH)

 **VERTICAL CUTTING UNIT**
[TCU26776](#) (BLADE)
[TCA19344](#) (SHAFT)
[TCU24328](#) (ADJUSTER)
[TCA19624](#) (SHIELD)

 **REEL CUTTING UNIT**
[BUC11255](#) (22 INCH), (7 - BLADE)
[BUC10415](#) (18 INCH), (11 - BLADE)

[CLICK PART NUMBER TO BUY](#)

[May 2023. Release Date.](#)