

REPLACEMENT PARTS GUIDE

636M Quik-Trak™ Mower with 36 inch Side Discharge Deck

ENGINE



OIL FILTER

[AM125424](#)

Change every 100 hours or Annually.



ENGINE OIL

[TY26669](#) (John Deere Plus-50™ 10W-30)
(2.1 L (2.2 qt.))

Change every 100 hours or Annually.



AIR FILTER

[MIU12554](#) (S/N: -0100000) (PRIMARY AIR
CLEANER FILTER ELEMENT)

[M113621](#) (S/N: 0100001-) (PRIMARY AIR
CLEANER FILTER ELEMENT)

Change every 300 hours.



[MIU12555](#) (S/N: -0100000) (SECONDARY
AIR CLEANER FILTER ELEMENT)

Change every 500 hours.



JOHN DEERE MULTI-PURPOSE HD LITHIUM COMPLEX GREASE

[TY24416](#)



GREASE GUN

[TY26183](#)

Change As Required.



FUEL FILTER - IN - LINE

[UC21217](#)

Change every 300 hours.



SPARK PLUG

[M805853](#)

Change every 1000 hours.



FUEL & AIR



FILLER CAP

[TCU34085](#) (S/N: -075001)

[AUC14828](#) (S/N: 075001-)



MUFFLER

[AUC18294](#) (S/N: - 060000) AND (S/N:100001-)

[TCA24531](#) (S/N: 060001 - 100000)

ELECTRICAL



ROTARY SWITCH

[TCA22740](#) (S/N: - 060000)

[AUC18708](#) (S/N: 060001-)



CONTROL LEVER THROTTLE CABLE

[AUC18415](#) (S/N: - 110000)

[AUC20360](#) (S/N: 110001-)



REVERSE IMPLEMENT PUSH SWITCH

[AUC11785](#)



IGNITION KEY

[AUC12681](#)



BATTERY

[TY25221B](#) (12 V) (FOR USA AND CANADA)

[MCYP340PF](#) (12 V) (NOT FOR USA AND
CANADA)

TRANSMISSION/ HYDRAULIC



HYDRAULIC OIL FILTER

[TCA23150](#)

Change every 100 hours or Annually.



TRACTION DRIVE BELT

[UC18232](#) (LGTH = 1301.5 mm,
WIDTH = 12.45 mm and TK = 8 mm)



REPLACEMENT PARTS GUIDE

636M Quik-Trak™ Mower with 36 inch Side Discharge Deck




MOWER BLADE
[TCU37208](#) (CUT LENGTH = 165 mm)



MULCH KIT
[UC10725](#) (CUT LENGTH = 178 mm)



MOWER DECK LEVELLING
[AM130907](#)

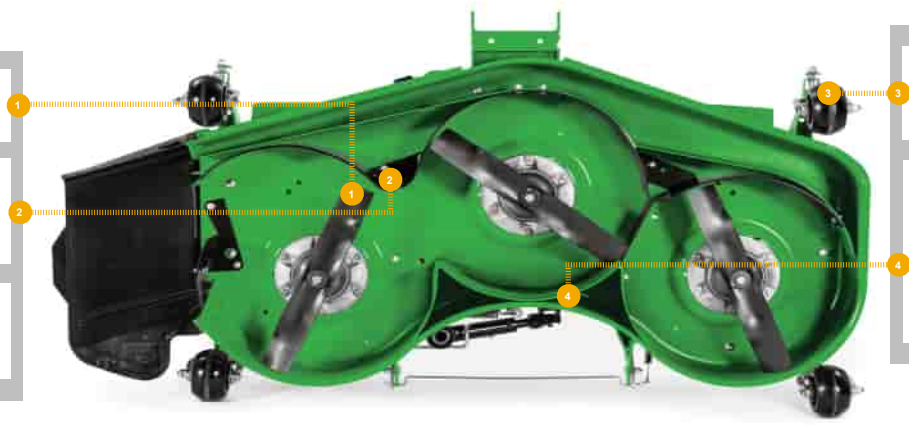

GAGE WHEELS
[TCU34317](#)



FLAT MOWER BELT
[TCU37206](#) (Primary) (S/N: - 045000)
(LGTH = 1779.01 mm,
WIDTH = 16.66 mm, TK = 10.31mm)



[UC11306](#) (Primary) (S/N: 045001-)
(LGTH = 1770.8 mm, WIDTH = 16 mm)